

# MHN30PR/MHP30PR

EXPORT MODEL MHN30PN


MAYTAG® COMMERCIAL  
ENERGY ADVANTAGE™  
HIGH-EFFICIENCY FRONT-LOAD WASHERS



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.

- ▶ MODIFIED ENERGY FACTOR 2.48
- ▶ WATER FACTOR 3.87
- ▶ CEE TIER III RATED



Designed for non-coin usage as well as compatible with most card readers.

## MICROPROCESSOR CONTROLS

Maytag® Computer Trac® controls are easy to program and operate. Plus, they give owners the flexibility to set vend prices by day, time, water temperature and Super Cycle options.

## A COMPLETE LINE OF ENERGY-EFFICIENT SOLUTIONS

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer a complete line of high-efficiency commercial laundry appliances—from industry-leading energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers—to help you save money and build profits.

## FOR YOUR CUSTOMERS:

- Large Capacity For Bulky Items—3.2 cu. ft.
- High-Speed Extraction Cuts Drying Time (as high as 1,000 RPMs)
- 180° Door Opening, Heavy-Duty Die-Cast Hinge For Easier Loading and Unloading
- Easy-To-Use One-Touch Cycle Selection
- Flexible Wash Options
- Quick Cycle Reduces Total Wash Time
- Automatic Detergent, Softener And Bleach Dispenser Drawer
- Large Windows For Convenience
- Front Control Panel 22° Angle For Easy Viewing
- ADA-Compliant With Optional Pedestal

## FOR YOUR OPERATION:

- High-Efficiency Design Meets CEE Tier III Rating
- TurboWash™ System Delivers Better Cleaning With Less Average Water Use Per Cycle
- Super Cycle Option Increases Revenue
- Self-Diagnostic Feature Cuts Service Cost And Minimizes Downtime
- Accu Trac® Audit System With Two-Way Data Communication
- Debit Card Compatible
- Advanced Computer Trac® Controls Allow For Easy Programming
- Simple Soft-Mount Design For Easy Installation

## BUILT-TO-LAST™ FEATURES:

- Porcelain-Enamel Top With Backsplash
- Precision Endurance Drive
- Controlled Induction Motor
- Best Warranty In The Business—5 Years All Parts



\*\* Shown with optional pedestal.

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND ON.*

SAVE UP TO 60% YEARLY\*  
ON ENERGY, WATER AND SEWER COSTS

visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
or call 800-662-3587

\*Maytag® Commercial front-load washer compared to commercial top-load washer. Individual savings may vary.

ML100225



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



**MHN30PR/MHP30PR**


**MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ HIGH-EFFICIENCY FRONT-LOAD WASHERS**

## Maytag® Energy Advantage™ HE Front-Load Washers

MICROPROCESSOR CONTROLS, CARD READER-READY OR NON-COIN OPERATION

WASHER SPECIFICATIONS	
<b>MODEL</b>	MHN30PR
<b>EXPORT MODEL</b>	MHN30PN
<b>FACTORY-INSTALLED PEDESTAL</b>	MHP30PR
<b>MOTOR</b>	
Variable-speed, reversible, thermoprotected, high-efficiency, controlled induction	Yes
Wash—HP (kw)	.09 (.07)
Extract—HP (kw)	.54 (.40)
Average energy consumption per cycle (kWh)	.054
<b>CAPACITY</b>	
Cylinder volume—cu. ft. (liters)	3.2 (91)
Cylinder diameter—in. (mm)	21.6 (547)
Cylinder depth—in. (mm)	13.4 (341)
<b>APPROXIMATE WATER USAGE—GALLONS (LITERS)</b>	
Average hot water usage, hot water cycle	3.4 (12.8)
Average hot water usage, warm water cycle	1.6 (6.1)
Average total water usage per cycle	12.4 (47)*
<b>ELECTRICAL RATING</b>	
Domestic model—voltage	120V/60 Hz
Export model—voltage	220–240V/50Hz
<b>BREAKER/FUSE MIN. REQUIREMENTS</b>	
Domestic model—amps	15
Export model—amps	10
<b>SOUND LEVEL (export model only)</b>	
Sound pressure level, Lpa (dBa) (Kpa: +/- 3.6 dbA)	58
<b>DOOR OPENING</b>	
Sq. in.	143
<b>WASH SPEED</b>	
RPM	40
<b>EXTRACT SPEED</b>	
Maximum RPM	1,000
Maximum g-force	306
<b>WATER SUPPLY PRESSURE</b>	
Psi (bar)	20–100 (1–8)
<b>INLET HOSE</b>	
Ft. (m)	4 (1.22)
<b>DRAIN HOSE</b>	
Ft. (m)	6 (1.83)
<b>ADJUSTABLE LEVELING LEGS</b>	Yes
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg)/MHP30PR—lbs. (kg)	244 (111)/249 (113)
Uncrated—lbs. (kg)/MHP30PR—lbs. (kg)	235 (107)/243 (110)
<b>PEDESTAL</b>	
Height—in. (mm)	2.75 (70)
<b>DIMENSIONS</b>	
Width—in. (mm)	27 (686)
Depth—in. (mm) includes handle	29.25 (743)
Height—in. (mm)	38.94 (983)**
Height MHP30PR—in. (mm)	41.69 (1059)

\* Average based on DOE J1 testing with factory preset cycles. \*\* Height MHN30PR and PN models. Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

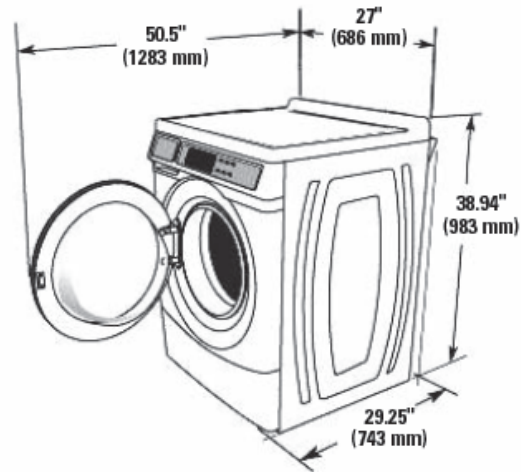

**Distributor**

**Best Wash Inc.**  
15012 Eddie Drive  
Humble, Texas 77396  
281-441-2465



## THE BEST WARRANTY IN THE BUSINESS—5 YEARS ON ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.